

PRODUCT ENHANCEMENT

ORGANIZING. STORING. SECURING.



FEATURES:

- Stronger cabinet design reduces deflection – even under heavy loads.
- Patent-pending hinge design allows easy installation and superior strength and security.
- New rounded edges and rounded corners on front door ensure safety in public access spaces.
- New electrical conduit knockouts on top and bottom speed installation.
- New, deeper rear panel has internal mounting features for accessories such as patch panels, cable managers and power strips.
- Numerous cable tie-down points have been provided in the rear panel for Velcro cable straps.

*An Employee
Owned Corporation*



**CHATSWORTH
PRODUCTS, INC.**

Organizing. Storing. Securing.


800-834-4969

techsupport@chatsworth.com
www.chatsworth.com

ENHANCED CUBE-iT PLUS™ DELIVERS HIGH PERFORMANCE AND HIGH VALUE

The newly enhanced CUBE-iT PLUS Wall-mount Cabinet from Chatsworth Products delivers industry-leading strength and rigidity with all of the quality and features you expect from CPI.

The CUBE-iT has been redesigned to deliver exceptional strength and rigidity in a swing out wall mount enclosure system. The new rear panel and hinge design contribute to an impressive 200 lb load rating. The patent-pending hinges facilitate quick and easy installation. Either left- or right-handed installations are possible with the same cabinet.

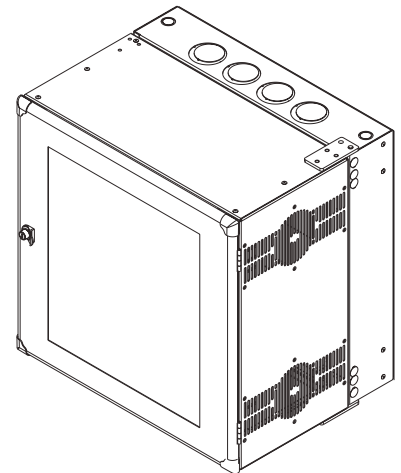

In addition to delivering customer-pleasing strength and security, the enhanced Cube-iT addresses safety concerns as well. The new front door design incorporates rounded edges and corners to improve safety in public access spaces.

Public access spaces also call for secure cable pathways. CPI delivers the smoothest interface for your conduit runs with four conduit knockouts sized for ½" or ¾" fittings and eight conduit knockouts sized for 2" or 2-½" fittings. All knockouts are placed 1-5/8" off of the wall in order to line up with conduit that is run on 1-5/8" strut channel. Large snap-in rubber grommets are also provided to fit the 2-½" knockouts for installations that do not employ conduit.

Another new feature of the enhanced CUBE-iT is a deeper rear panel with interior mounting locations for accessory brackets. The 45-degree brackets provide 3 RMU of space for mounting patch panels, cable managers, power strips, and other devices in the rear panel. This allows valuable rack mount space to be used for other equipment.

A locking front door and rear panel provide security. The swing-out cabinet body enables easy access to the rear of installed equipment.

The Cube-iT continues to be offered in three popular overall heights: 24", 36" and 48" and three depths: 18", 24" and 30". The cabinet ships fully assembled. Installation hardware is included.

For more information, please contact your authorized CPI Distributor or CPI Customer Service Representative, or go to www.chatsworth.com

Features:

Front door is reversible

Side panels are vented top and bottom on both sides

Rear panel can be mounted so that cabinet swings to the right or left


Optional fan kit mounts to side panel

Optional power strip mounts inside the top, bottom or side of cabinet

Optional light can be mounted at bottom or top of the rear or front of the cabinet

Ships fully assembled with eight 1/4-10 x 2" cabinet mounting screws and 50 each #12-24 equipment mounting screws

Cube-iT **PLUS** features all steel construction with a 200 lb load rating

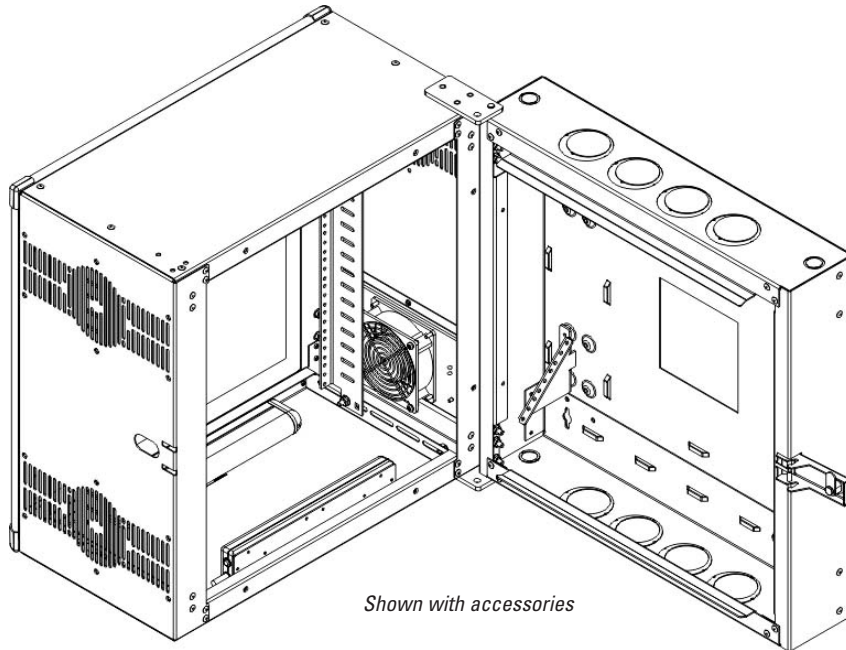

Shown with accessories

Patent-pending hinge provides superior strength and facilitates quick and easy installation

Rear panel features four 1/2" or 3/4" and eight 2" or 2-1/2" knockouts for conduit

6" x 6" pass through port for rear cable entry

16" center-to-center mounting location aligns with wall studs

5" deep rear panel provides extra space for mounting patch panels and other equipment

Locking front door and rear panel

Simple, one-person installation

One pair of mounting rails with EIA-310 compliant universal 5/8"-5/8"-1/2" alternating hole pattern are included with each cabinet and are fully adjustable front-to-rear

Additional mounting rails are available

Dimensions:

Heights:


24" (12 RMU)
36" (18 RMU)
48" (26 RMU)

Width:

24" (19" EIA Mounting)

Usable depths:


18" depth offers 11.8" of useable
24" depth offers 17.8" of useable
30" depth offers 23.8" of useable

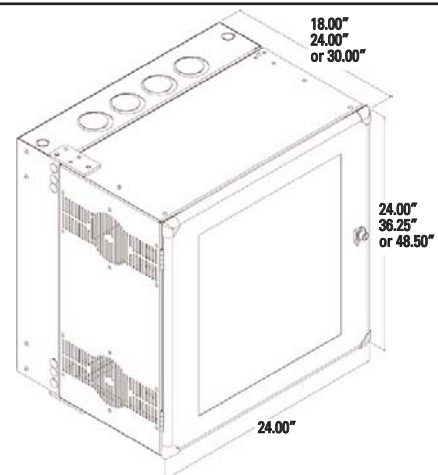

CUBE-IT PLUS ACCESSORIES

Universal Horizontal Cable Manager


- Route patch cords and other cables through cable guides
- Hinged, snap-on cover
- Black, textured powder coat finish



Part Number	Description	Color	Shipping Weight
30139-719	1 RMU, 19"W	Black	2 lb
30130-719	2 RMU, 19"W	Black	3 lb
30131-719	3 RMU, 19"W	Black	4 lb

NEW! Fan Kit


- Draws air into the cabinet, pressurizing the cabinet and forcing warm air out of the vents
- Provides 100 CFM in free air at 115VAC
- Mounts to the inside of cabinet over lower vent pattern
- Includes installation hardware and cable ties



Part Number	Description	Color	Shipping Weight
12804-701	Fan Kit	Black	4 lb

NEW! Filter Kit For Fan


- Reduces dust and contamination
- Can be mounted internally for security or externally for convenient access



Part Number	Description	Color	Shipping Weight
12805-701	Filter Kit	Black	4 lb
12805-201	Filter Kit	White	4 lb
Replacement Filter			
12806-001	Box of 6 Filters		1 lb

NEW! Rail Kit


- Two additional rails for equipment mounting
- Includes installation hardware
- Brushed aluminum finish



Part Number	Description	Shipping Weight
12787-524	Mounting Rails, 1 Pair, 12 RMU	3 lb
12787-536	Mounting Rails, 1 Pair, 18 RMU	4 lb
12787-548	Mounting Rails, 1 Pair, 26 RMU	5 lb

NEW! 45° Mounting Bracket


- Facilitates mounting patch panels, cable manager or other devices in rear panel
- Provides 3 RMU of 19" rack-mount space
- Includes installation hardware



Part Number	Description	Shipping Weight
12796-501	45 Degree Mounting Bracket, Pair	3 lb

NEW! Power Strip


- Eight 3-prong, 15A, 125 VAC outlets
- Circuit breaker and 10' cord
- Mounts inside the top, bottom or side of cabinet
- Includes installation hardware



Part Number	Description	Color	Shipping Weight
12820-701	Non-Surge Protected	Black	4 lb
12820-703	Surge Protected	Black	4 lb

NEW! Light


- Provides 8 Watts of fluorescent light from 115VAC with On/Off switch and 6' cord
- Easy installation to bottom or top of the cabinet
- White lens with white housing
- Includes installation hardware

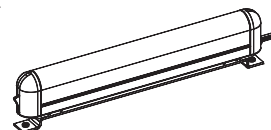

Part Number	Description	Shipping Weight
12803-701	8 Watt Light With Black Bracket	3 lb

10" Deep Shelf

- Provides 17.25"W x 10"D surface for equipment
- Supports 40 lb
- Requires 2 RMU
- Mounts flush with front face of mounting rails



Part Number	Description	Color	Shipping Weight
12291-201	10"D Shelf	White	4 lb
12291-701	10"D Shelf	Black	4 lb

Note: Can also use Single-Sided Shelf Series 40074 or Small Peripheral Shelf Series 10758.



CHATSWORTH
PRODUCTS, INC.

CUBE-iT PLUS™ WALL-MOUNT CABINET SYSTEM ENHANCEMENT

Organizing. Storing. Securing.

800-834-4969


techsupport@chatsworth.com
www.chatsworth.com

Cube-iT PLUS Cabinet Part Numbers


Cube-iT PLUS Cabinet System				
Part Number	RMU	Description	Door	Shipping Weight
24" H Cabinet				
11890-X24	12	24"W x 24"H x 18"D	Solid Metal	70 lb
11901-X24	12	24"W x 24"H x 18"D	Solid Plexiglass	66 lb
11840-X24	12	24"W x 24"H x 24"D	Solid Metal	79 lb
11900-X24	12	24"W x 24"H x 24"D	Solid Plexiglass	75 lb
11996-X24	12	24"W x 24"H x 30"D	Solid Metal	90 lb
12419-X24	12	24"W x 24"H x 30"D	Solid Plexiglass	86 lb
36" H Cabinet				
11890-X36	18	24"W x 36"H x 18"D	Solid Metal	99 lb
11901-X36	18	24"W x 36"H x 18"D	Solid Plexiglass	93 lb
11840-X36	18	24"W x 36"H x 24"D	Solid Metal	111 lb
11900-X36	18	24"W x 36"H x 24"D	Solid Plexiglass	105 lb
11996-X36	18	24"W x 36"H x 30"D	Solid Metal	124 lb
12419-X36	18	24"W x 36"H x 30"D	Solid Plexiglass	118 lb
48" H Cabinet				
11890-X48	26	24"W x 48"H x 18"D	Solid Metal	121lb
11901-X48	26	24"W x 48"H x 18"D	Solid Plexiglass	114 lb
11840-X48	26	24"W x 48"H x 24"D	Solid Metal	135 lb
11900-X48	26	24"W x 48"H x 24"D	Solid Plexiglass	128 lb
11996-X48	26	24"W x 48"H x 30"D	Solid Metal	151 lb
12419-X48	26	24"W x 48"H x 30"D	Solid Plexiglass	143 lb

Note: X=Color: 2=White, 7=Black


Simple One-person Installation

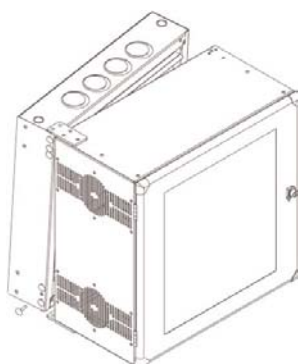

Step 1: Remove rear panel.

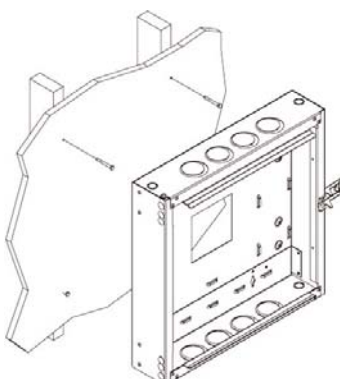

Step 2: Attach rear panel to wall.

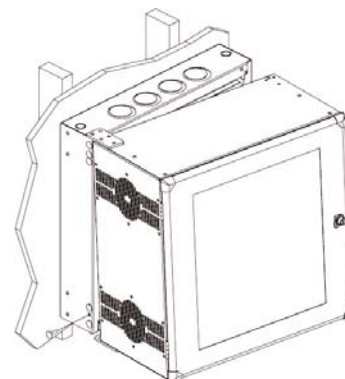

Step 3: Re-attach cabinet body to rear panel.